



Global Leading Manufacturer of High Thermal Conductivity IMS/MCCL

High Thermal Conductivity IMS/MCCL Datasheet

广东博钰电子有限公司
GuangDong BOYU Electronics CO.,Ltd.





Introduction

Guangdong BOYU Electronics Co., Ltd, is a high-tech enterprise which integrates R&D, production, service and one-stop solutions and concentrates on providing high-quality products of Aluminum and Copper Based CCL and special metal CCL to our customers.

The company has been awarded a series of international certifications such as ISO, UL, SGS, IATF16949 and ROHS.

The company is committed to the global market and has successfully exported products to Europe, USA, Southeast Asia and other countries and regions.

The company adheres to the business strategy of "Using the most advanced technology, Training high-quality employees, Manufacturing high-quality products", striving for innovation and contributing to the development of new technology and new materials for the electronic industry.

产品应用

特殊照明

Special lighting

工控散热方案

Industrial cooling solutions

电源模块

Power Module

整流器

Rectifier

产品特性

高导热特性

High thermal conductivity

出色的耐热性

Excellent heat resistance

符合RoHS要求

Meet the RoHS requirements

无卤素板材

Halogen-free

UL E333613

UL E333613

符合UL 94V-0

Comply with UL 94V-0





AL-01-B 40 产品性能表

(Criterion: Typical value is based on specimen of 1.5mm AL\100μm dielectric just for reference.)

性能 PROPERTIES	测试方法 TEST METHOD	单位 UNIT	指标值 INDICATOR	典型值 TYPICAL VALUES
------------------	---------------------	------------	------------------	-----------------------

热性能 THERMAL PROPERTIES

绝缘层热导率 Thermal Conductivity	ASTM D5470	W/m.K	-	4.0
热阻 Thermal Resistivity	ASTM D5470	°C*in ² /W	-	0.052
玻璃化温度 TG	DSC	°C	-	140
热分解温度 TD	TGA(Wt5%loss)	°C	≥360	400
最大操作温度 MOT	UL94	°C	-	130
热应力 Thermal Stress	Solder floating 288°C	Minute	≥15	25

电性能 ELECTRICAL PROPERTIES

体积电阻率 Volume Resistivity	IPC-TM-650 2.5.17	MΩ.cm	≥10 ⁶	10 ⁸
表面电阻率 Surface Resistivity	IPC-TM-650 2.5.17	MΩ	≥10 ⁴	10 ⁷
介电常数 Dielectric Constant	IPC-TM-650 2.5.5.3	1MHz	-	4.8
耗损系数 Dissipation Factor	IPC-TM-650 2.5.5.3	1MHz	-	≤0.02
耐压 Hi-pot	T/CPCA4105-2016 B.11	AC/KV	-	4.5
耐电弧 Arc Resistance	IPC-TM-650 2.5.1	Sec	≥60	120

机械性能 MECHANICAL PROPERTIES

剥离强度 Peel Strength	IPC-TM-650 2.4.8	Lb/in	≥8	8.5
吸水率 Moisture Absorption	D-24/23 IPC-TM-650 2.6.2.1	%	≤1.5	0.5

机构评级&阻燃性 AGENCY RATINGS&DURABILITY


U.L.可燃性 U.L. Flammability	UL94	Class	V-0	V-0
相对漏电起痕指数 (CTI)	IEC60112	V	≥600	600

高导热金属基覆铜板 High Thermal Conductivity IMS CCL

产品介绍 Introduction of products

高导热金属基覆铜板能够针对不同的应用领域要求、各种铜厚、绝缘层特性、不同金属背板的需求，提供符合客户要求的高性价比产品。

For different areas of application requirements, various copper thickness, insulating layer characteristics and the need of different metal backboard, we can provide cost-effective metal based copper clad laminate with high thermal conductivity that meet customers' requirements.

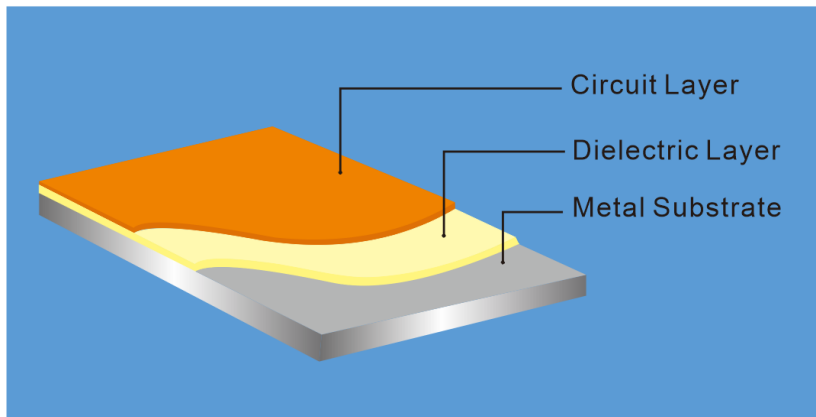

产品规格 Specification of products

Standard BOYU Material Overview			
项目Item	公差Tolerances	TYPE	AL-01-B 40
介质层厚度Dielectric Thickness (μm)	±10	Standard	75、100、120、180
		Special	60
铜箔厚度Base Copper (μm)	±10%	Standard	35、70、105
		Special	140、210
铝板厚度Aluminum Thickness (mm)	±0.02	Standard	0.5 ~ 3.0
		Special	3.0 ~ 5.0
铝板型号Aluminum Type	N/A	Standard	1060、3003、5052
生产尺寸Laminate Size (mm)	±2	Standard	500×600、1000×1200、1050×1250
最低订量MOQ request	N/A	Above Special	MOQ 100Sheet
备注Remark	Finish thickness=Aluminum Thickness + Dielectric Thickness + Base Copper		

Globalization Care Cooperation Win-Win

广东博钰电子有限公司

GuangDong BOYU Electronics Co.,Ltd.

中国广东省惠州市惠澳大道惠南高新科技产业园民富路2号

2. Min-Fu R. D, HuiAo Street, South of Huizhou High-tech
Industrial Zone. Huizhou City, Guangdong Province, China.

TEL:0752-6811106 FAX : 0752-6811109

Http://www.boyu-global.com

E-mail: sales@boyu-global.com

Copyright: 202108

